


Changes: EYP36, EYP37 and EYP38 withdrawn.

30 OCT 2025

©2019 ORO NAVIGACIJA

AIRAC AMDT 03/25

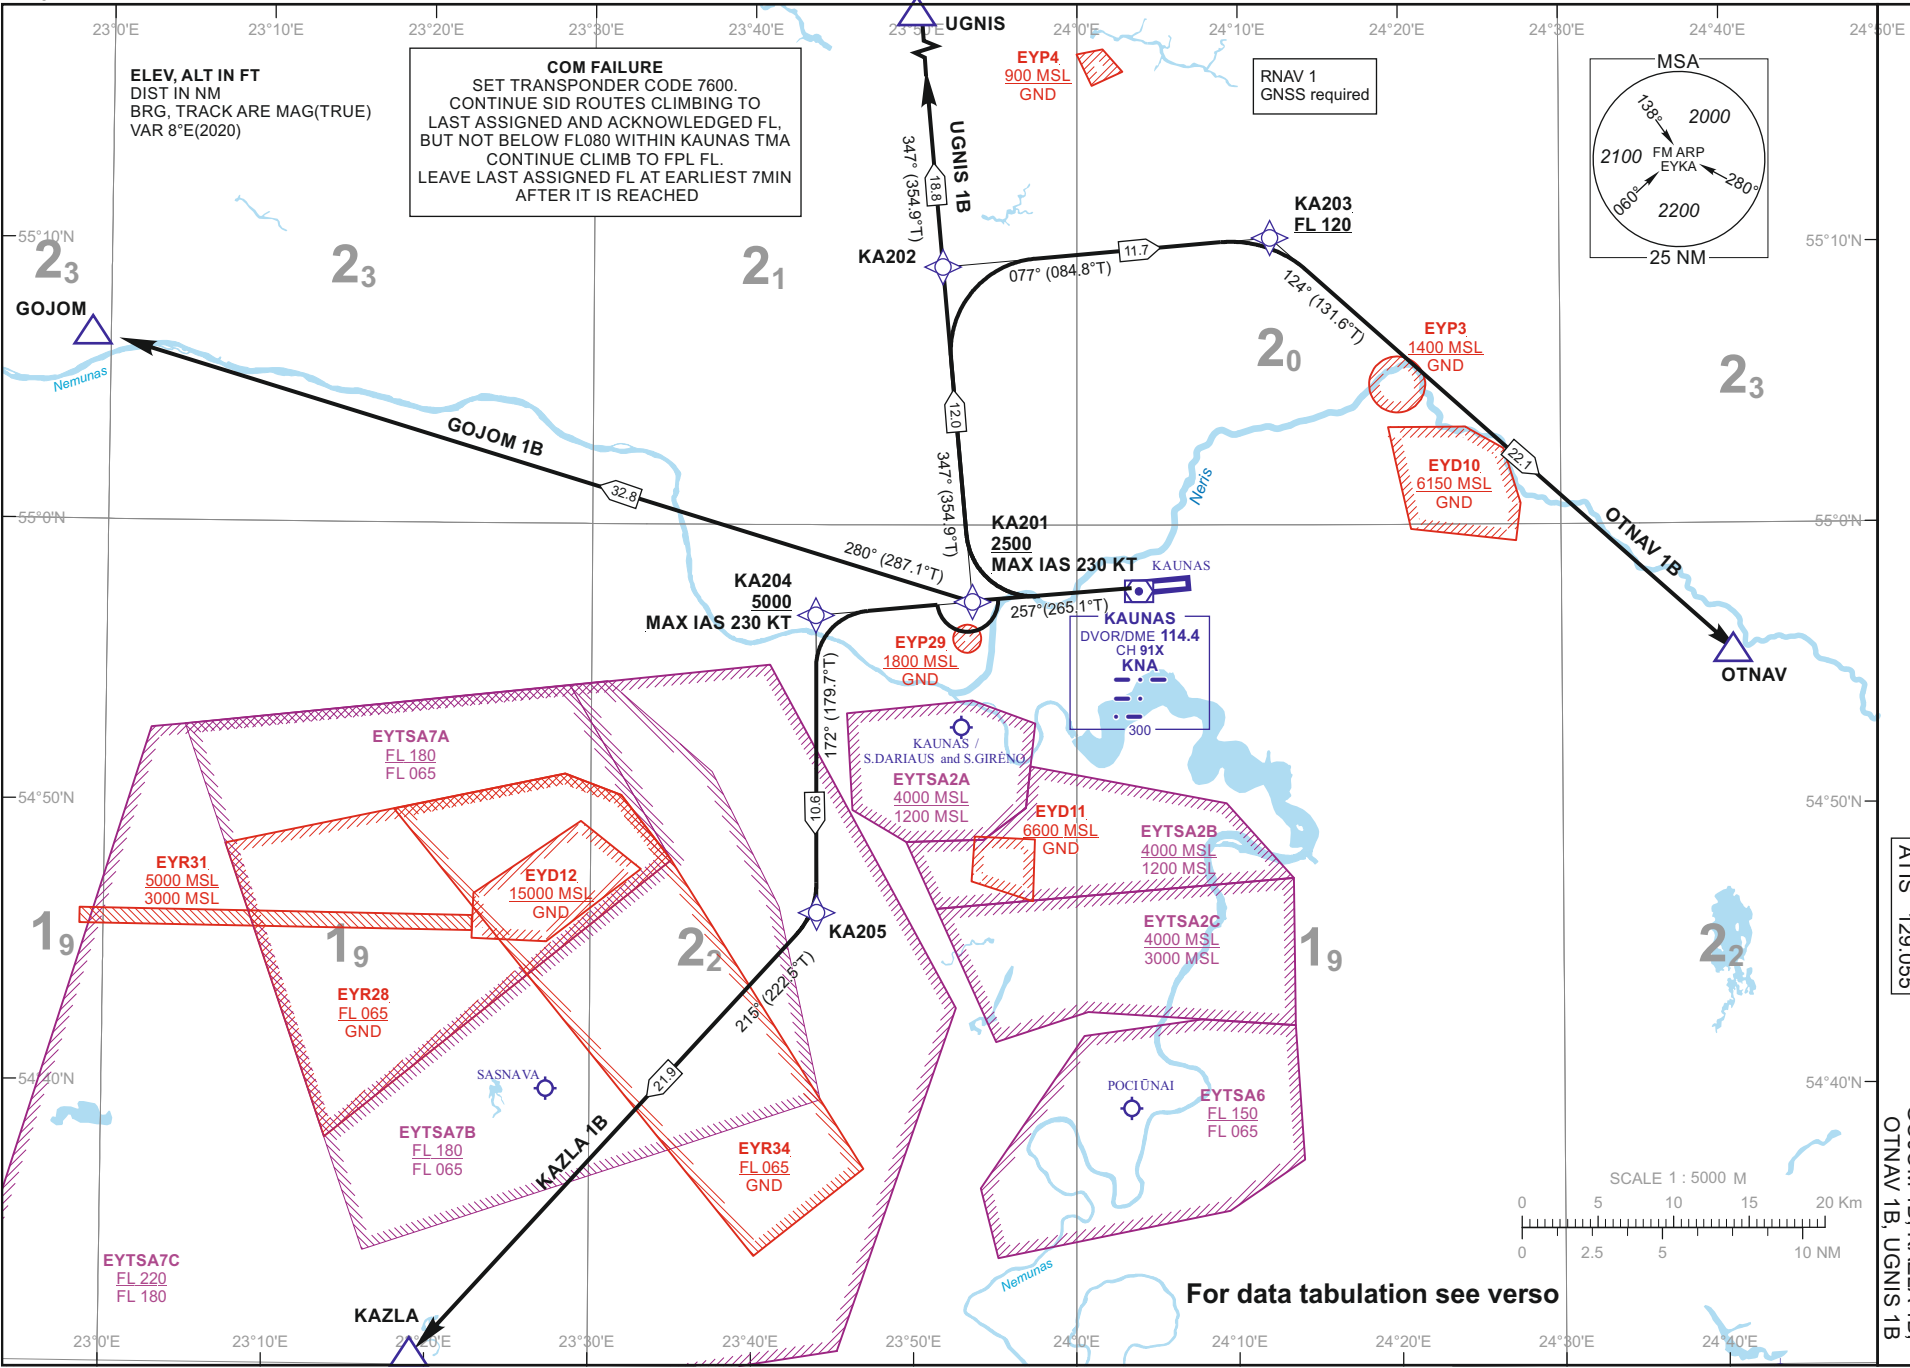

STANDARD DEPARTURE CHART  
INSTRUMENT (SID) - ICAO

TRANSITION ALT  
5000

TWR	124.205
ATIS	129.055

KAUNAS (EYKA)  
RNAV RMY 26  
GOJOM 1B, KAZLA 1B,  
OTNAV 1B, UGNIS 1B

AIP LITHUANIA

EYKA AD 2.24-11-1

**STANDARD DEPARTURE CHART  
INSTRUMENT (SID) - ICAO**

 TRANSITION ALT  
5000

**KAUNAS (EYKA)  
RNAV RWY 26**  
GOJOM 1B, KAZLA 1B,  
OTNAV 1B, UGNIS 1B

**TABULAR DESCRIPTION**
**GOJOM 1B** PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL KA201

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	KA201	—	257(265.1)	7.5	5.7	—	+2500	-230	RNAV1
002	TF	GOJOM	—	280(287.1)	7.5	32.8	—	—	—	RNAV1

**KAZLA 1B** PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL KA204

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	KA204	—	257(265.1)	7.5	11.3	—	+5000	-230	RNAV1
002	TF	KA205	—	172(179.7)	7.5	10.6	—	—	—	RNAV1
003	TF	KAZLA	—	215(222.5)	7.5	21.9	—	—	—	RNAV1

**OTNAV 1B** PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL KA201

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	KA201	—	257(265.1)	7.5	5.7	—	+2500	-230	RNAV1
002	TF	KA202	—	347(354.9)	7.5	12.0	—	—	—	RNAV1
003	TF	KA203	—	077(084.8)	7.5	11.7	—	+FL120	—	RNAV1
004	TF	OTNAV	—	124(131.6)	7.5	22.1	—	—	—	RNAV1

**UGNIS 1B** PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL KA201

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	KA201	—	257(265.1)	7.5	5.7	—	+2500	-230	RNAV1
002	TF	KA202	—	347(354.9)	7.5	12.0	—	—	—	RNAV1
003	TF	UGNIS	—	347(354.9)	7.5	18.8	—	—	—	RNAV1

**WAYPOINT COORDINATES**

FIX/POINTS	COORDINATES	FIX/POINTS	COORDINATES
<b>KA201</b>	54 57 15.5N 023 53 31.8E	<b>GOJOM</b>	55 06 43.5N 022 58 51.0E
<b>KA202</b>	55 09 11.6N 023 51 40.0E	<b>KAZLA</b>	54 29 59.3N 023 18 33.8E
<b>KA203</b>	55 10 13.4N 024 11 59.6E	<b>OTNAV</b>	54 55 33.0N 024 40 36.0E
<b>KA204</b>	54 56 45.6N 023 43 51.2E	<b>UGNIS</b>	55 27 50.9N 023 48 44.5E
<b>KA205</b>	54 46 10.5N 023 43 56.9E	<b>KNA</b>	54 57 37.4N 024 03 59.1E

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYKA AD 2.22