


Changes: SID TAGOL 1B and EYP45 withdrawn; SID ATMEZ 1B and EYP46 added; note.

19 FEB 2026

©2019 ORO NAVIGACIJA

AIRAC AMDT 01/26

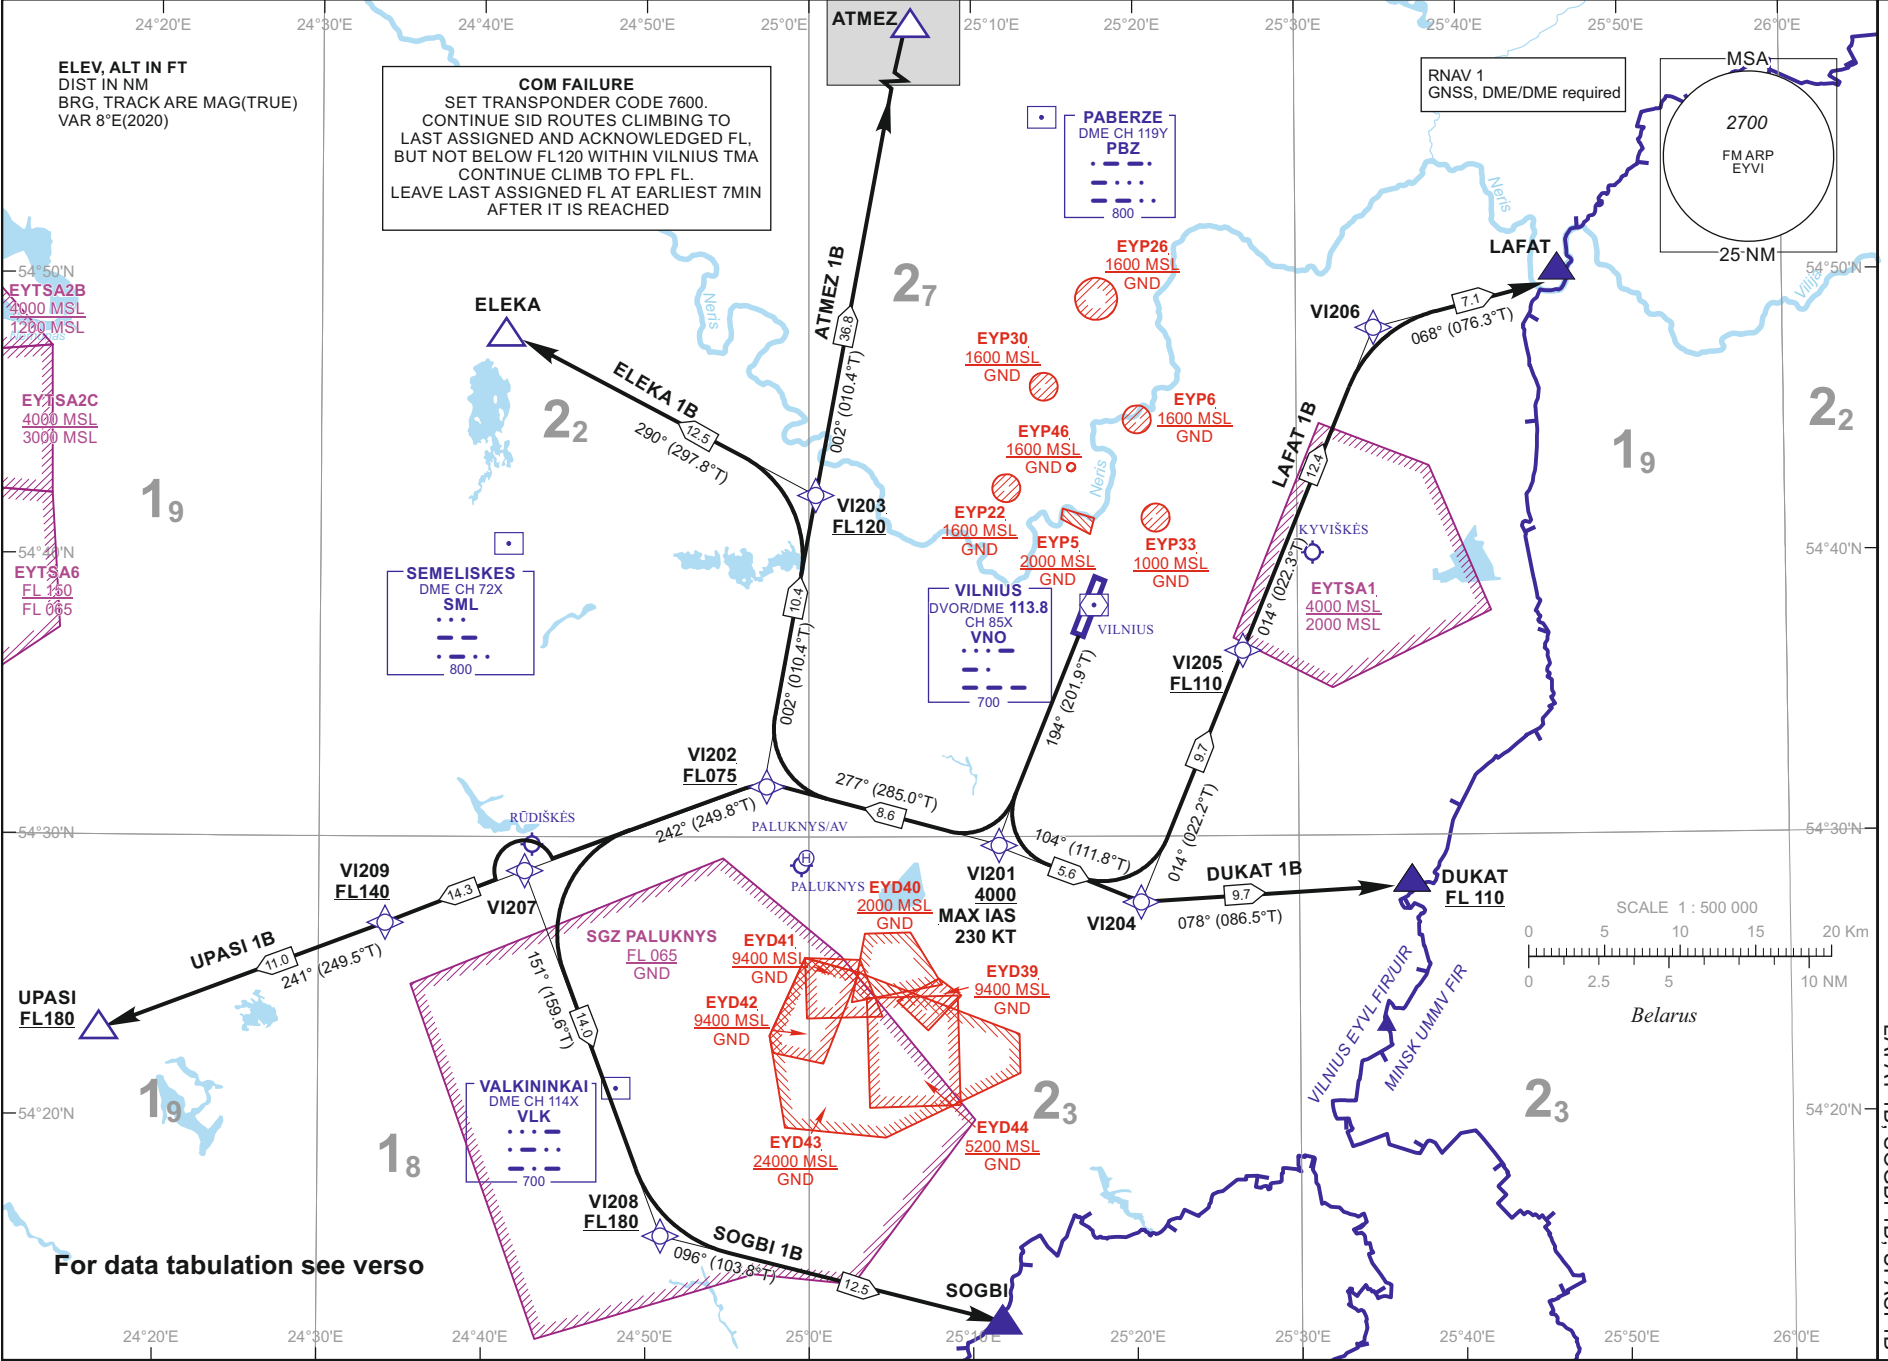

**STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO**

TRANSITION ALT
5000

TWR 118.205
APP 120.705
ATIS 125.805

VILNIUS (EYVI)
RNAV RMY 19
ATMEZ 1B, DUKAT 1B, ELEKA 1B,
LAFAT 1B, SOGBI 1B, UPASI 1B

AIP LITHUANIA

EYVI AD 2.24-11-1

**STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO**TRANSITION ALT
5000**VILNIUS (EYVI)
RNAV RWY 19**
ATMEZ 1B, DUKAT 1B, ELEKA 1B,
LAFAT 1B, SOGBI 1B, UPASI 1B

TABULAR DESCRIPTION

ATMEZ 1B PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VI201										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	VI201	—	194(201.9)	8.3	8.0	—	+4000	-230	RNAV1
002	TF	VI202	—	277(285.0)	8.3	8.6	—	+FL075	—	RNAV1
003	TF	VI203	—	002(010.4)	8.3	10.4	—	+FL120	—	RNAV1
004	TF	ATMEZ	—	002(010.4)	8.3	36.8	—	—	—	RNAV1
DUKAT 1B PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VI201										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	VI201	—	194(201.9)	8.3	8.0	—	+4000	-230	RNAV1
002	TF	VI204	—	104(111.8)	8.3	5.6	—	—	—	RNAV1
003	TF	DUKAT	—	078(086.5)	8.3	9.7	—	+FL110	—	RNAV1
ELEKA 1B PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VI201										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	VI201	—	194(201.9)	8.3	8.0	—	+4000	-230	RNAV1
002	TF	VI202	—	277(285.0)	8.3	8.6	—	+FL075	—	RNAV1
003	TF	VI203	—	002(010.4)	8.3	10.4	—	+FL120	—	RNAV1
004	TF	ELEKA	—	290(297.8)	8.3	12.5	—	—	—	RNAV1
LAFAT 1B PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VI201										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	VI201	—	194(201.9)	8.3	8.0	—	+4000	-230	RNAV1
002	TF	VI204	—	104(111.8)	8.3	5.6	—	—	—	RNAV1
003	TF	VI205	—	014(022.2)	8.3	9.7	—	+FL110	—	RNAV1
004	TF	VI206	—	014(022.3)	8.3	12.4	—	—	—	RNAV1
005	TF	LAFAT	—	068(076.3)	8.3	7.1	—	—	—	RNAV1
SOGBI 1B PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VI201										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	VI201	—	194(201.9)	8.3	8.0	—	+4000	-230	RNAV1
002	TF	VI202	—	277(285.0)	8.3	8.6	—	+FL075	—	RNAV1
003	TF	VI207	—	242(249.8)	8.3	9.0	—	—	—	RNAV1
004	TF	VI208	—	151(159.6)	8.3	14.0	—	+FL180	—	RNAV1
005	TF	SOGBI	—	096(103.8)	8.3	12.5	—	—	—	RNAV1

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYVI AD 2.22

**STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO**

TRANSITION ALT
5000

**VILNIUS (EYVI)
RNAV RWY 19**
ATMEZ 1B, DUKAT 1B, ELEKA 1B,
LAFAT 1B, SOGBI 1B, UPASI 1B

TABULAR DESCRIPTION

UPASI 1B PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VI201										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	VI201	—	194(201.9)	8.3	8.0	—	+4000	-230	RNAV1
002	TF	VI202	—	277(285.0)	8.3	8.6	—	+FL075	—	RNAV1
003	TF	VI209	—	242(249.8)	8.3	14.3	—	+FL140	—	RNAV1
004	TF	UPASI	—	241(249.5)	8.3	11.0	—	+FL180	—	RNAV1

Passing 2500 FT MSL contact with Vilnius APP Channel 120.705

WAYPOINT COORDINATES			
FIX/POINTS	COORDINATES	FIX/POINTS	COORDINATES
VI201	54 29 48.5N 025 11 27.2E	ATMEZ	55 18 20.9N 025 12 04.7E
VI202	54 32 01.0N 024 57 11.3E	DUKAT	54 28 17.3N 025 36 55.2E
VI203	54 42 13.8N 025 00 25.2E	ELEKA	54 48 01.6N 024 41 20.1E
VI204	54 27 43.3N 025 20 21.8E	LAFAT	54 49 52.0N 025 46 43.0E
VI205	54 36 41.4N 025 26 39.2E	SOGBI	54 12 47.0N 025 11 45.0E
VI206	54 48 10.6N 025 34 46.6E	UPASI	54 23 12.1N 024 16 37.3E
VI207	54 28 54.2N 024 42 42.7E	PBZ	54 55 38.0N 025 14 23.0E
VI208	54 15 48.2N 024 51 01.3E	SML	54 40 31.2N 024 41 32.4E
VI209	54 27 03.5N 024 34 12.1E	VLK	54 21 02.9N 024 48 13.2E
		VNO	54 38 09.8N 025 17 37.1E

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYVI AD 2.22

Changes: REP ATMEZ instead V1107; REP TAGOL and SID TAGOL 1B withdrawn.

SPECIALUSIS TUŠČIAS PUSLAPIS

THIS PAGE INTENTIONALLY LEFT BLANK