


Changes: COM FAILURE.

16 APR 2026

©2019 ORO NAVIGACIJA

AIRAC AMDT 02/26

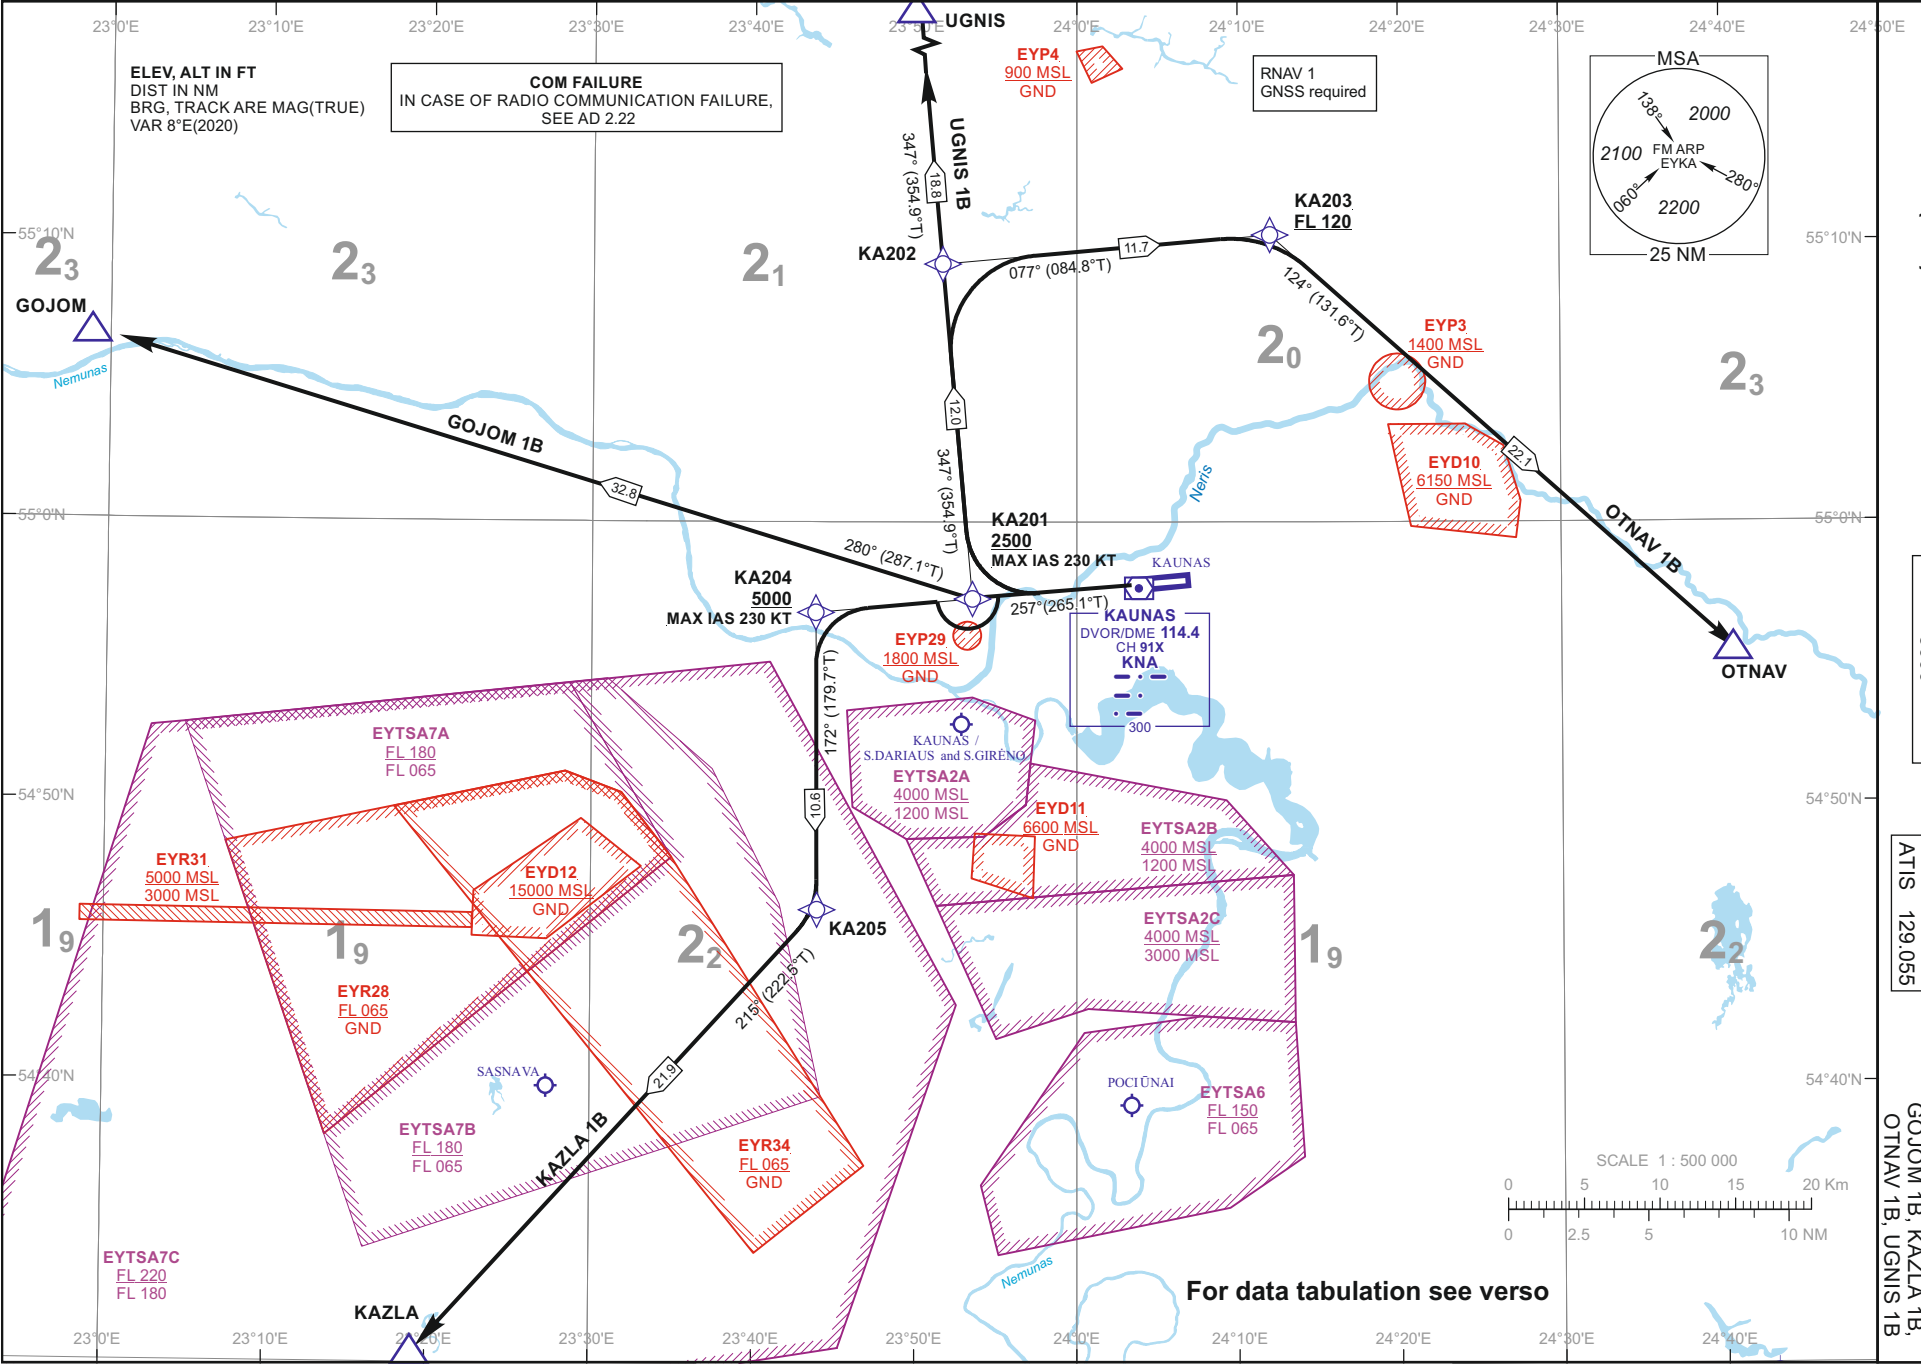

STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

AIP LITHUANIA

EYKA AD 2.24-11-1

**STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO**

 TRANSITION ALT
5000

**KAUNAS (EYKA)
RNAV RWY 26**
GOJOM 1B, KAZLA 1B,
OTNAV 1B, UGNIS 1B

TABULAR DESCRIPTION
GOJOM 1B PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL KA201

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	KA201	—	257(265.1)	7.5	5.7	—	+2500	-230	RNAV1
002	TF	GOJOM	—	280(287.1)	7.5	32.8	—	—	—	RNAV1

KAZLA 1B PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL KA204

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	KA204	—	257(265.1)	7.5	11.3	—	+5000	-230	RNAV1
002	TF	KA205	—	172(179.7)	7.5	10.6	—	—	—	RNAV1
003	TF	KAZLA	—	215(222.5)	7.5	21.9	—	—	—	RNAV1

OTNAV 1B PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL KA201

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	KA201	—	257(265.1)	7.5	5.7	—	+2500	-230	RNAV1
002	TF	KA202	—	347(354.9)	7.5	12.0	—	—	—	RNAV1
003	TF	KA203	—	077(084.8)	7.5	11.7	—	+FL120	—	RNAV1
004	TF	OTNAV	—	124(131.6)	7.5	22.1	—	—	—	RNAV1

UGNIS 1B PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL KA201

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	KA201	—	257(265.1)	7.5	5.7	—	+2500	-230	RNAV1
002	TF	KA202	—	347(354.9)	7.5	12.0	—	—	—	RNAV1
003	TF	UGNIS	—	347(354.9)	7.5	18.8	—	—	—	RNAV1

WAYPOINT COORDINATES

FIX/POINTS	COORDINATES	FIX/POINTS	COORDINATES
KA201	54 57 15.5N 023 53 31.8E	GOJOM	55 06 43.5N 022 58 51.0E
KA202	55 09 11.6N 023 51 40.0E	KAZLA	54 29 59.3N 023 18 33.8E
KA203	55 10 13.4N 024 11 59.6E	OTNAV	54 55 33.0N 024 40 36.0E
KA204	54 56 45.6N 023 43 51.2E	UGNIS	55 27 50.9N 023 48 44.5E
KA205	54 46 10.5N 023 43 56.9E	KNA	54 57 37.4N 024 03 59.1E

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYKA AD 2.22