


Changes: COM FAILURE.

16 APR 2026

©2019 ORO NAVIGACIJA

AIRAC AMDT 02/26

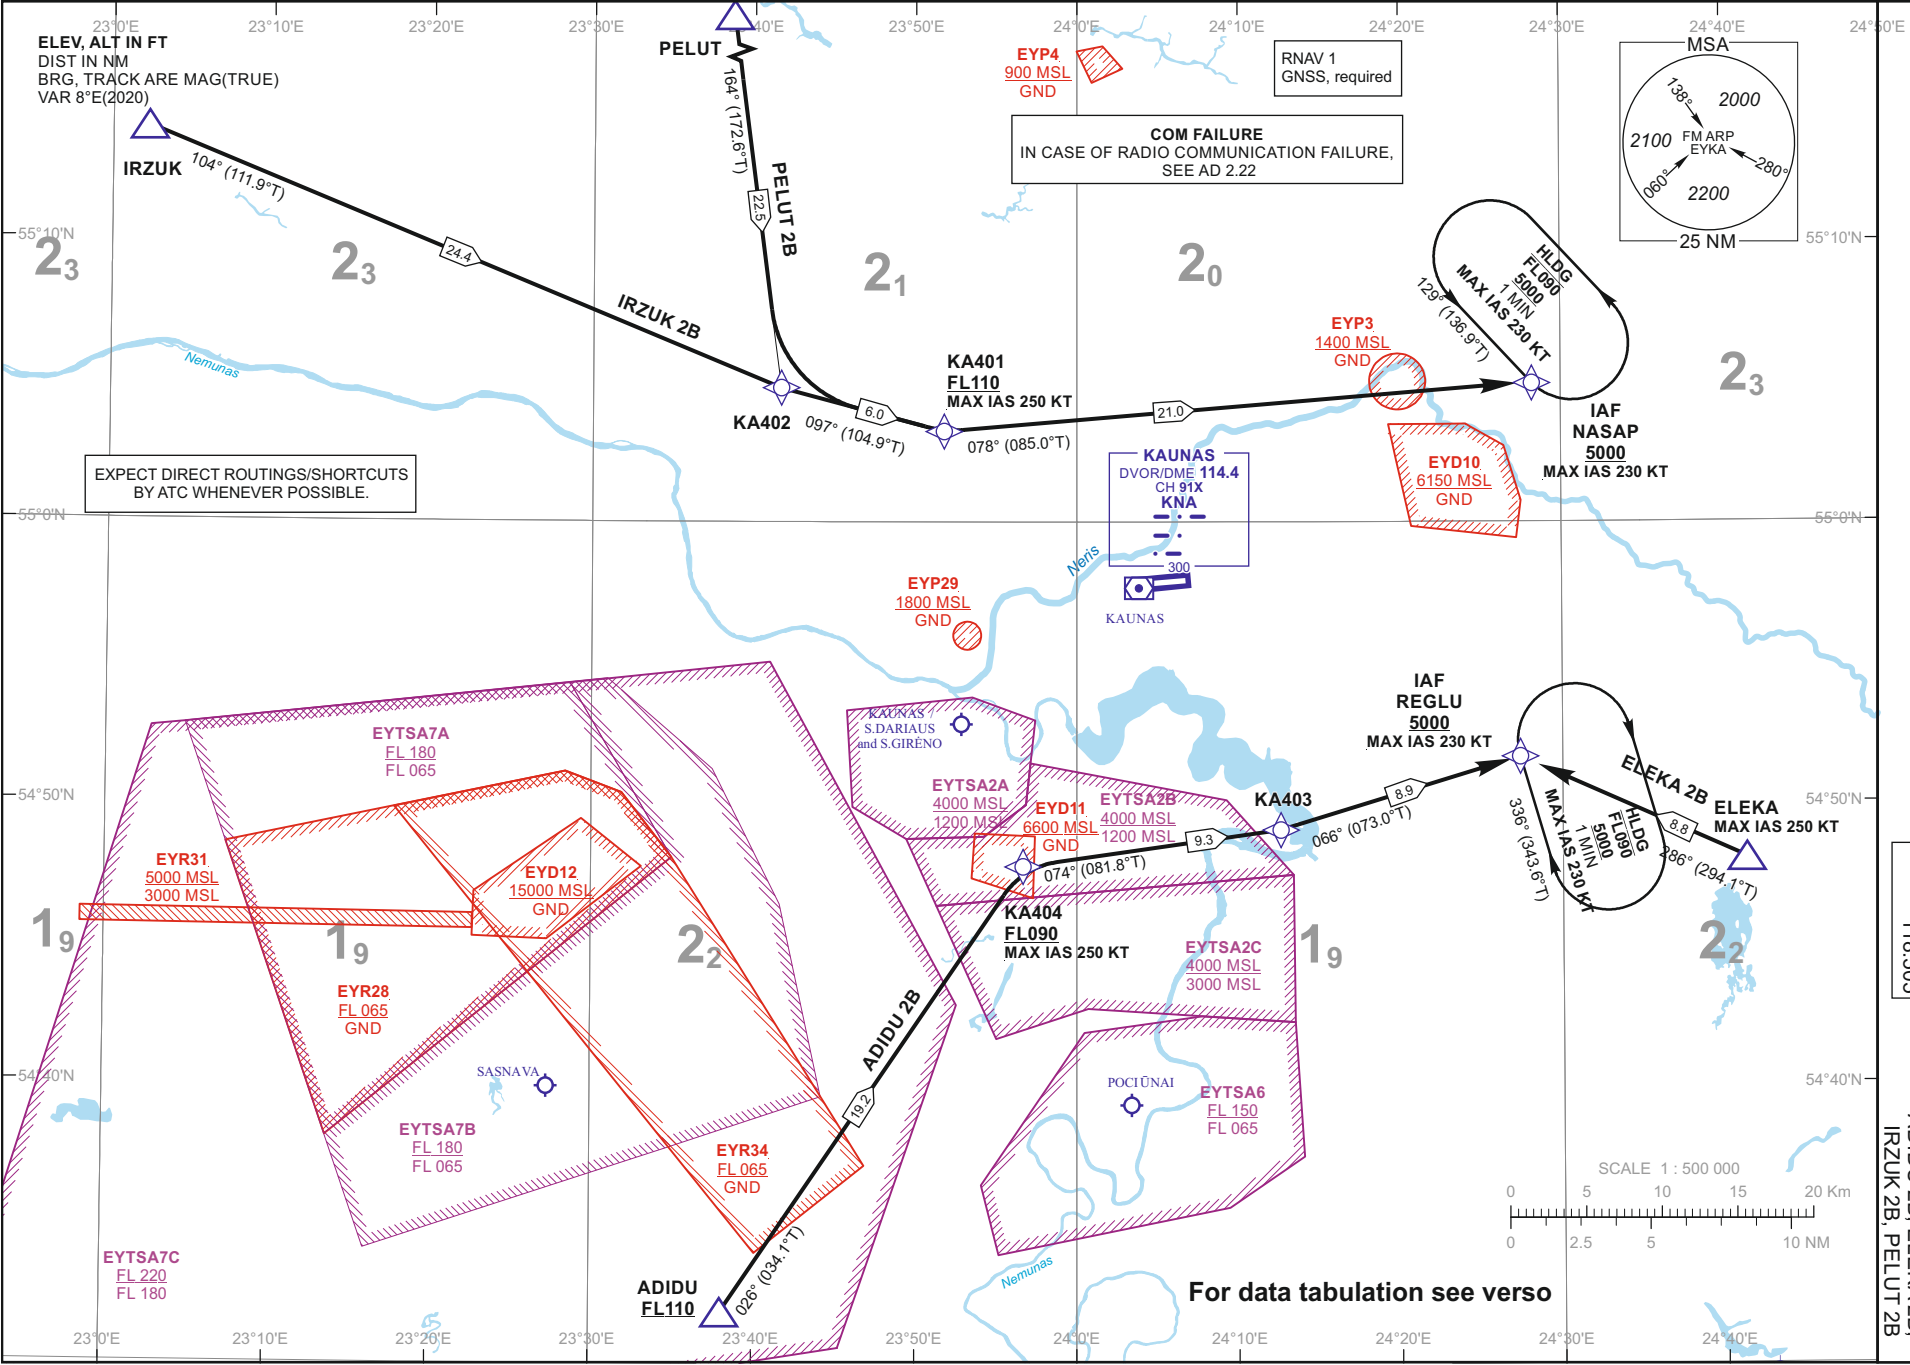

**STANDARD ARRIVAL CHART**  
**INSTRUMENT (STAR) - ICAO**

TRANSITION ALT  
5000

ATIS 129 055  
TWR 124 205  
118 505

**KAUNAS (EYKA)**  
RNAV RMY 26  
ADIDU 2B, ELEKA 2B,  
IRZUK 2B, PELUT 2B

AIP LITHUANIA

EYKAAD 2.24-13-1

**STANDARD ARRIVAL CHART  
INSTRUMENT (STAR) - ICAO**TRANSITION ALT  
5000**KAUNAS (EYKA)  
RNAV RWY 26**ADIDU 2B, ELEKA 2B,  
IRZUK 2B, PELUT 2B

## TABULAR DESCRIPTION

**ADIDU 2B**

| Serial Number | Path Descriptor | Waypoint Identifier | Fly-over | Course/Track °M(°T) | Magnetic Variation | Distance (NM)/ Time | Turn Direction | Altitude (FT)/ Flight level | Speed (KT) | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------------|--------------------|---------------------|----------------|-----------------------------|------------|--------------------------|
| 001           | IF              | ADIDU               | —        | —                   | 8.1                | —                   | —              | +FL110                      | —          | RNAV1                    |
| 002           | TF              | KA404               | —        | 026(034.1)          | 8.1                | 19.2                | —              | +FL090                      | -250       | RNAV1                    |
| 003           | TF              | KA403               | —        | 074(081.8)          | 7.5                | 9.3                 | —              | —                           | —          | RNAV1                    |
| 004           | TF              | REGLU               | —        | 066(073.0)          | 7.5                | 8.9                 | —              | +5000                       | -230       | RNAV1                    |

**ELEKA 2B**

| Serial Number | Path Descriptor | Waypoint Identifier | Fly-over | Course/Track °M(°T) | Magnetic Variation | Distance (NM)/ Time | Turn Direction | Altitude (FT)/ Flight level | Speed (KT) | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------------|--------------------|---------------------|----------------|-----------------------------|------------|--------------------------|
| 001           | IF              | ELEKA               | —        | —                   | 8.4                | —                   | —              | —                           | -250       | RNAV1                    |
| 002           | TF              | REGLU               | —        | 286(294.1)          | 7.5                | 8.8                 | —              | +5000                       | -230       | RNAV1                    |

**IRZUK 2B**

| Serial Number | Path Descriptor | Waypoint Identifier | Fly-over | Course/Track °M(°T) | Magnetic Variation | Distance (NM)/ Time | Turn Direction | Altitude (FT)/ Flight level | Speed (KT) | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------------|--------------------|---------------------|----------------|-----------------------------|------------|--------------------------|
| 001           | IF              | IRZUK               | —        | —                   | 8.1                | —                   | —              | —                           | —          | RNAV1                    |
| 002           | TF              | KA402               | —        | 104(111.9)          | 8.1                | 24.4                | —              | —                           | —          | RNAV1                    |
| 003           | TF              | KA401               | —        | 097(104.9)          | 7.5                | 6.0                 | —              | +FL110                      | -250       | RNAV1                    |
| 004           | TF              | NASAP               | —        | 078(085.0)          | 7.5                | 21.0                | —              | +5000                       | -230       | RNAV1                    |

**PELUT 2B**

| Serial Number | Path Descriptor | Waypoint Identifier | Fly-over | Course/Track °M(°T) | Magnetic Variation | Distance (NM)/ Time | Turn Direction | Altitude (FT)/ Flight level | Speed (KT) | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------------|--------------------|---------------------|----------------|-----------------------------|------------|--------------------------|
| 001           | IF              | PELUT               | —        | —                   | 8.3                | —                   | —              | —                           | —          | RNAV1                    |
| 002           | TF              | KA402               | —        | 164(172.6)          | 8.3                | 22.5                | —              | —                           | —          | RNAV1                    |
| 003           | TF              | KA401               | —        | 097(104.9)          | 7.5                | 6.0                 | —              | +FL110                      | -250       | RNAV1                    |
| 004           | TF              | NASAP               | —        | 078(085.0)          | 7.5                | 21.0                | —              | +5000                       | -230       | RNAV1                    |

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYKA AD 2.22

**STANDARD ARRIVAL CHART  
INSTRUMENT (STAR) - ICAO**

TRANSITION ALT  
5000

**KAUNAS (EYKA)  
RNAV RWY 26**  
ADIDU 2B, ELEKA 2B,  
IRZUK 2B, PELUT 2B

**TABULAR DESCRIPTION**

| HOLDINGS IDENTIFICATION |                                 |                             |                           |                                     |                       |   |                   |
|-------------------------|---------------------------------|-----------------------------|---------------------------|-------------------------------------|-----------------------|---|-------------------|
| <i>Holding fix</i>      | <i>Geographical coordinates</i> | <i>Inbound track °M(°T)</i> | <i>Magnetic Variation</i> | <i>Outbound distance (NM)/ Time</i> | <i>Turn Direction</i> | <i>Minimum/Maximum holding altitude (FT)/Flight level</i> | <i>Speed (KT)</i> |
| NASAP                   | 55 04 57.2N 024 28 10.6E        | 129(136.9)                  | 7.5                       | 1 min                               | L                     | +5000 / -FL090  | -230              |
| REGLU                   | 54 51 37.2N 024 27 23.7E        | 336(343.6)                  | 7.5                       | 1 min                               | R                     | +5000 / -FL090  | -230              |

| WAYPOINT COORDINATES |                          |              |                          |
|----------------------|--------------------------|--------------|--------------------------|
| FIX/POINTS           | COORDINATES              | FIX/POINTS   | COORDINATES              |
| <b>KA401</b>         | 55 03 13.0N 023 51 45.7E | <b>ADIDU</b> | 54 31 49.1N 023 38 03.5E |
| <b>KA402</b>         | 55 04 45.7N 023 41 40.4E | <b>ELEKA</b> | 54 48 01.6N 024 41 20.1E |
| <b>KA403</b>         | 54 49 01.2N 024 12 35.9E | <b>IRZUK</b> | 55 13 58.8N 023 02 14.4E |
| <b>KA404</b>         | 54 47 42.6N 023 56 40.9E | <b>NASAP</b> | 55 04 57.2N 024 28 10.6E |
|                      |                          | <b>PELUT</b> | 55 27 04.4N 023 36 37.1E |
|                      |                          | <b>REGLU</b> | 54 51 37.2N 024 27 23.7E |
|                      |                          | <b>KNA</b>   | 54 57 37.4N 024 03 59.1E |

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYKA AD 2.22

Changes:

SPECIALUSIS TUŠČIAS PUSLAPIS

*THIS PAGE INTENTIONALLY LEFT BLANK*