


STANDARD DEPARTURE CHART  
INSTRUMENT (SID) - ICAO

TRANSITION ALT  
5000

TWR	124,205
ATIS	118,505 129,055

**KAUNAS (EYKA)**  
**RNAV RMY 08**  
 GOJOM 1A, KAZLA 1A,  
 OTNAV 1A, UGNIS 1A

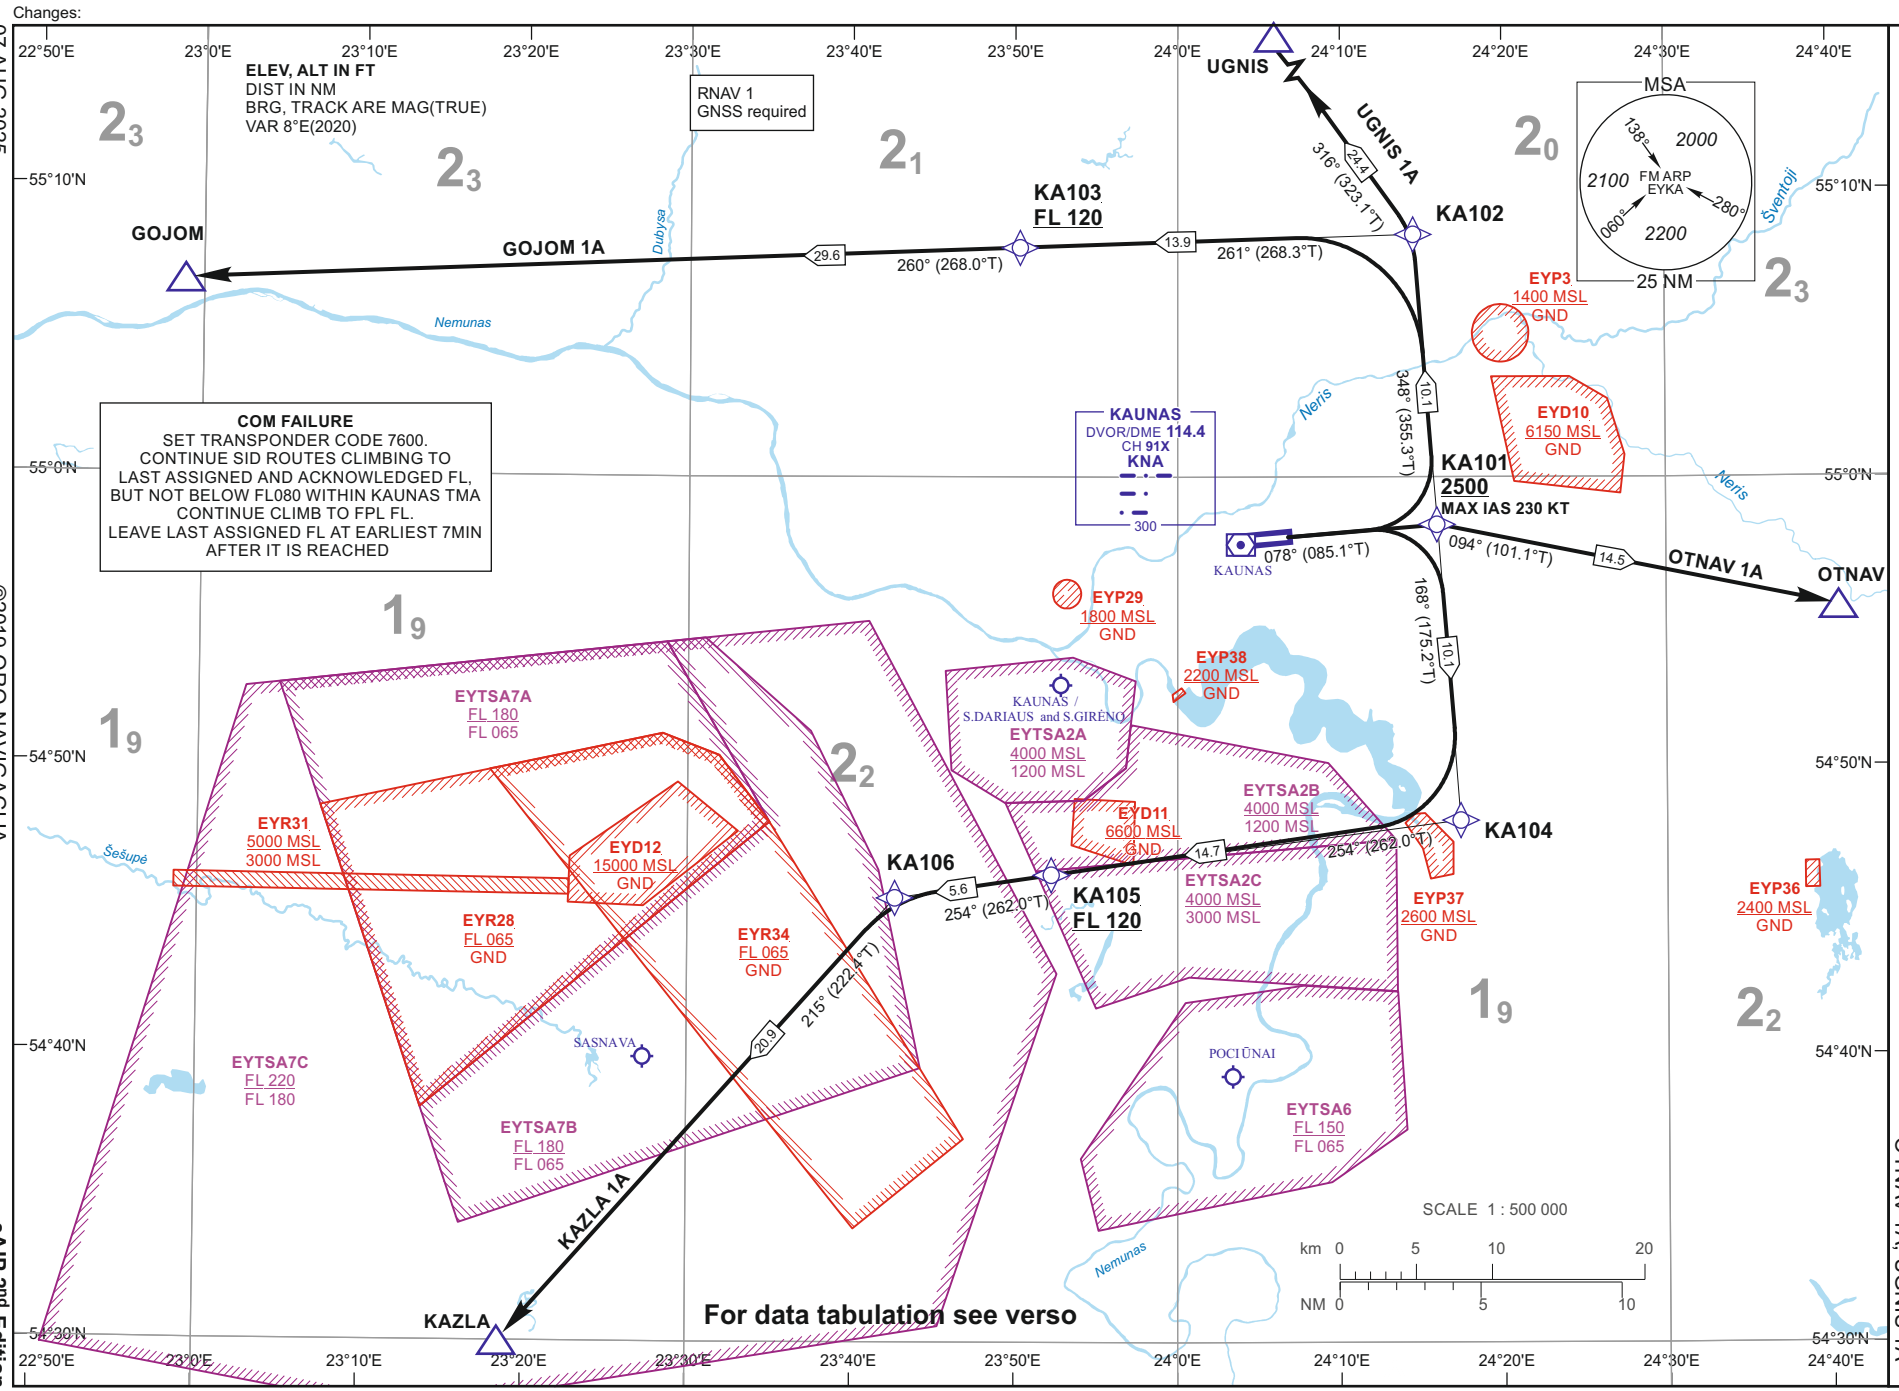

07 AUG 2025

©2019 ORO NAVIGACIJA

eAIP 2nd Edition

**STANDARD DEPARTURE CHART  
INSTRUMENT (SID) - ICAO**

 TRANSITION ALT  
5000

**KAUNAS (EYKA)  
RNAV RWY 08**  
GOJOM 1A, KAZLA 1A,  
OTNAV 1A, UGNIS 1A

**TABULAR DESCRIPTION**
**GOJOM 1A** PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL KA101

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	KA101	—	078(085.1)	7.5	5.3	—	+2500	-230	RNAV1
002	TF	KA102	—	348(355.3)	7.5	10.1	—	—	—	RNAV1
003	TF	KA103	—	261(268.3)	7.5	13.9	—	+FL120	—	RNAV1
004	TF	GOJOM	—	260(268.0)	7.5	29.6	—	—	—	RNAV1

**KAZLA 1A** PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL KA101

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	KA101	—	078(085.1)	7.5	5.3	—	+2500	-230	RNAV1
002	TF	KA104	—	168(175.2)	7.5	10.1	—	—	—	RNAV1
003	TF	KA105	—	254(262.0)	7.5	14.7	—	+FL120	—	RNAV1
004	TF	KA106	—	254(262.0)	7.5	5.6	—	—	—	RNAV1
005	TF	KAZLA	—	215(222.4)	7.5	20.9	—	—	—	RNAV1

**OTNAV 1A** PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL KA101

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	KA101	—	078(085.1)	7.5	5.3	—	+2500	-230	RNAV1
002	TF	OTNAV	—	094(101.1)	7.5	14.5	—	—	—	RNAV1

**UGNIS 1A** PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL KA101

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	KA101	—	078(085.1)	7.5	5.3	—	+2500	-230	RNAV1
002	TF	KA102	—	348(355.3)	7.5	10.1	—	—	—	RNAV1
003	TF	UGNIS	—	316(323.1)	7.5	24.4	—	—	—	RNAV1

**WAYPOINT COORDINATES**

FIX/POINTS	COORDINATES	FIX/POINTS	COORDINATES
KA101	54 58 21.9N 024 15 57.4E	GOJOM	55 06 43.5N 022 58 51.0E
KA102	55 08 25.0N 024 14 30.9E	KAZLA	54 29 59.3N 023 18 33.8E
KA103	55 07 57.6N 023 50 18.0E	OTNAV	54 55 33.0N 024 40 36.0E
KA104	54 48 17.1N 024 17 25.3E	UGNIS	55 27 50.9N 023 48 44.5E
KA105	54 46 11.9N 023 52 16.7E	KNA	54 57 37.4N 024 03 59.1E
KA106	54 45 24.8N 023 42 42.2E		

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYKA AD 2.22