


# STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO



TRANSITION ALT  
5000

TWR 124.205  
ATIS 118.505  
129.055

**KAUNAS (EYKA)**  
**RNAV RMY 26**  
GOJOM 1B, KAZLA 1B,  
OTNAV 1B, UGNIS 1B

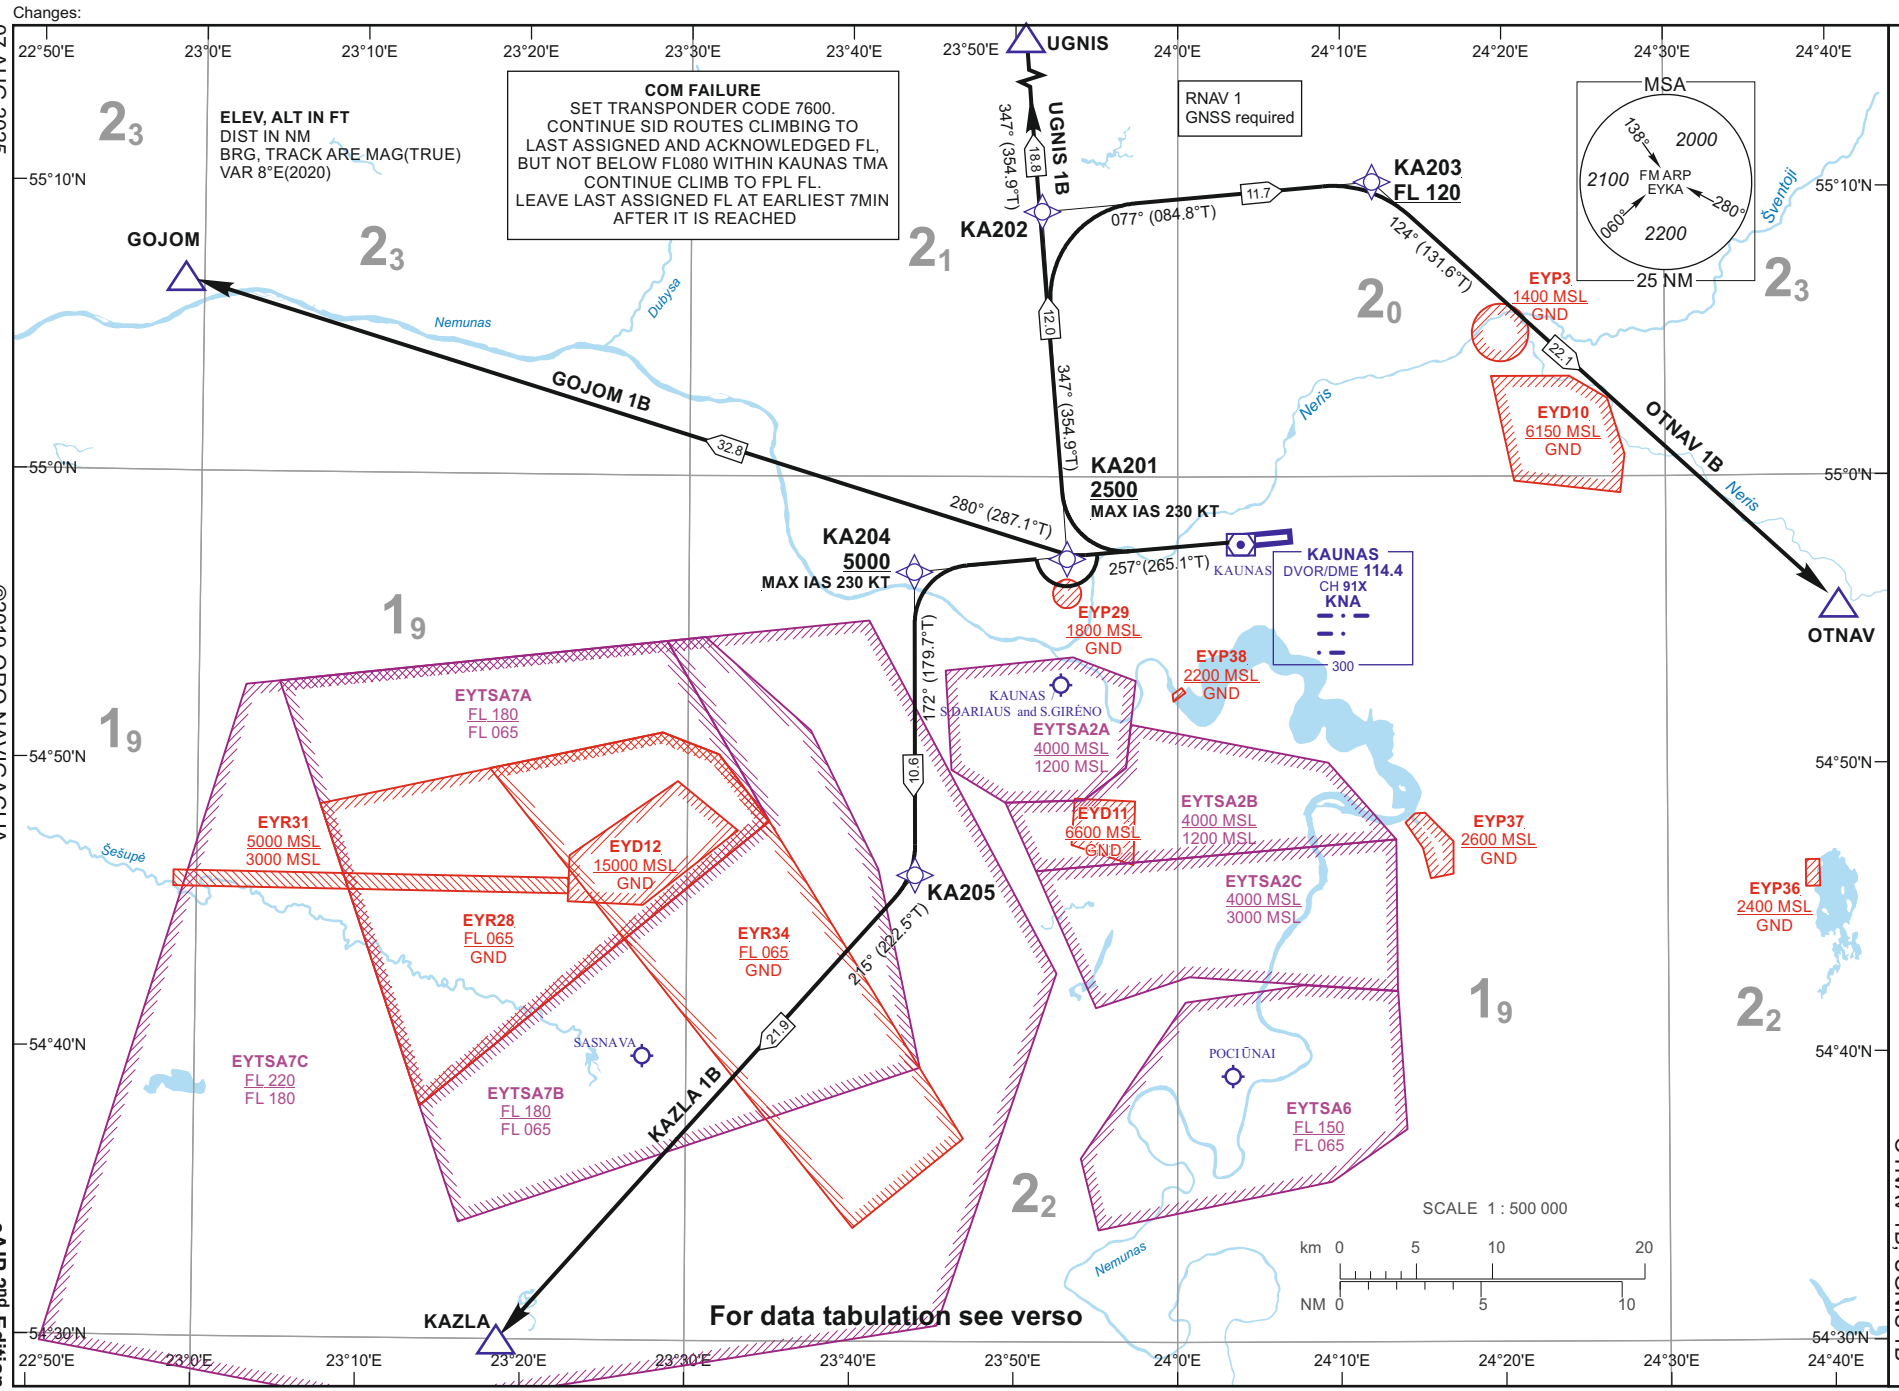

RNAV 1  
GNSS required



For data tabulation see verso

Changes:  
07 AUG 2025

©2019 ORO NAVIGACIJA

eAIP 2nd Edition

**STANDARD DEPARTURE CHART  
INSTRUMENT (SID) - ICAO**

 TRANSITION ALT  
5000

**KAUNAS (EYKA)  
RNAV RWY 26**  
GOJOM 1B, KAZLA 1B,  
OTNAV 1B, UGNIS 1B

**TABULAR DESCRIPTION**
**GOJOM 1B** PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL KA201

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	KA201	—	257(265.1)	7.5	5.7	—	+2500	-230	RNAV1
002	TF	GOJOM	—	280(287.1)	7.5	32.8	—	—	—	RNAV1

**KAZLA 1B** PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL KA204

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	KA204	—	257(265.1)	7.5	11.3	—	+5000	-230	RNAV1
002	TF	KA205	—	172(179.7)	7.5	10.6	—	—	—	RNAV1
003	TF	KAZLA	—	215(222.5)	7.5	21.9	—	—	—	RNAV1

**OTNAV 1B** PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL KA201

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	KA201	—	257(265.1)	7.5	5.7	—	+2500	-230	RNAV1
002	TF	KA202	—	347(354.9)	7.5	12.0	—	—	—	RNAV1
003	TF	KA203	—	077(084.8)	7.5	11.7	—	+FL120	—	RNAV1
004	TF	OTNAV	—	124(131.6)	7.5	22.1	—	—	—	RNAV1

**UGNIS 1B** PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL KA201

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	KA201	—	257(265.1)	7.5	5.7	—	+2500	-230	RNAV1
002	TF	KA202	—	347(354.9)	7.5	12.0	—	—	—	RNAV1
003	TF	UGNIS	—	347(354.9)	7.5	18.8	—	—	—	RNAV1

**WAYPOINT COORDINATES**

FIX/POINTS	COORDINATES	FIX/POINTS	COORDINATES
KA201	54 57 15.5N 023 53 31.8E	GOJOM	55 06 43.5N 022 58 51.0E
KA202	55 09 11.6N 023 51 40.0E	KAZLA	54 29 59.3N 023 18 33.8E
KA203	55 10 13.4N 024 11 59.6E	OTNAV	54 55 33.0N 024 40 36.0E
KA204	54 56 45.6N 023 43 51.2E	UGNIS	55 27 50.9N 023 48 44.5E
KA205	54 46 10.5N 023 43 56.9E	KNA	54 57 37.4N 024 03 59.1E

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYKA AD 2.22