
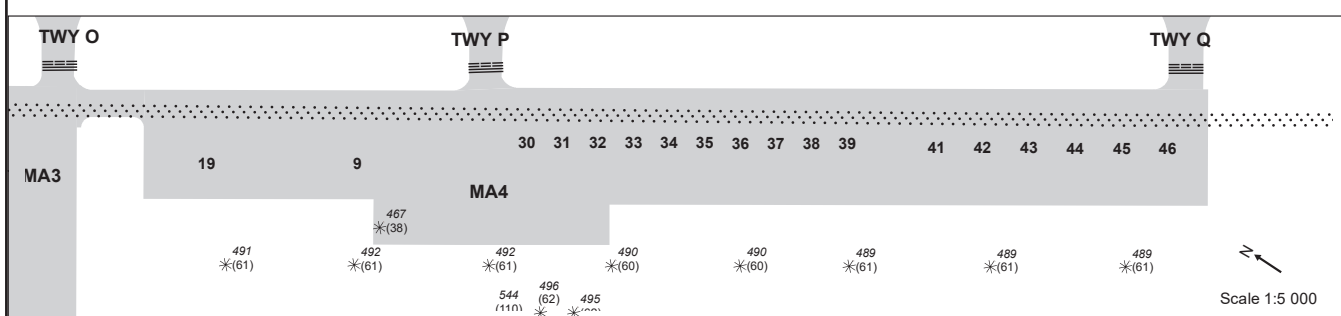
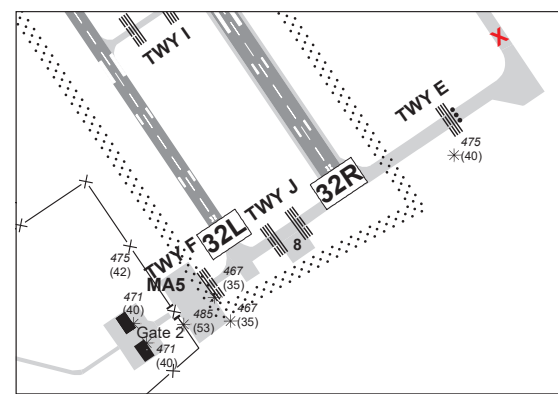
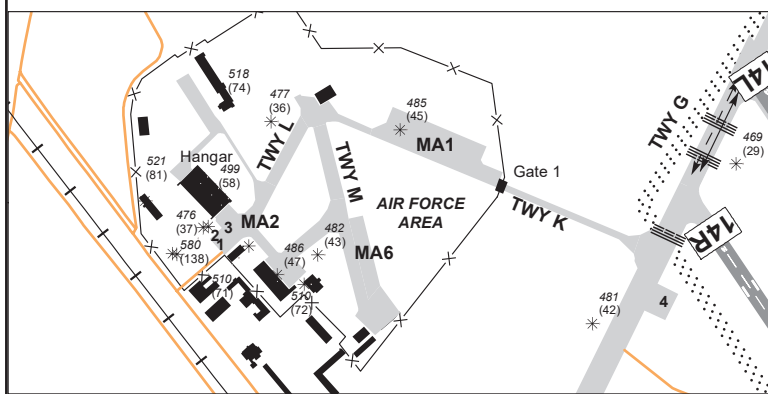


AERODROME GROUND MOVEMENT AND PARKING CHART - ICAO

APRON ELEV 447

TWR 120.405
ATIS 120.755

ŠIAULIAI

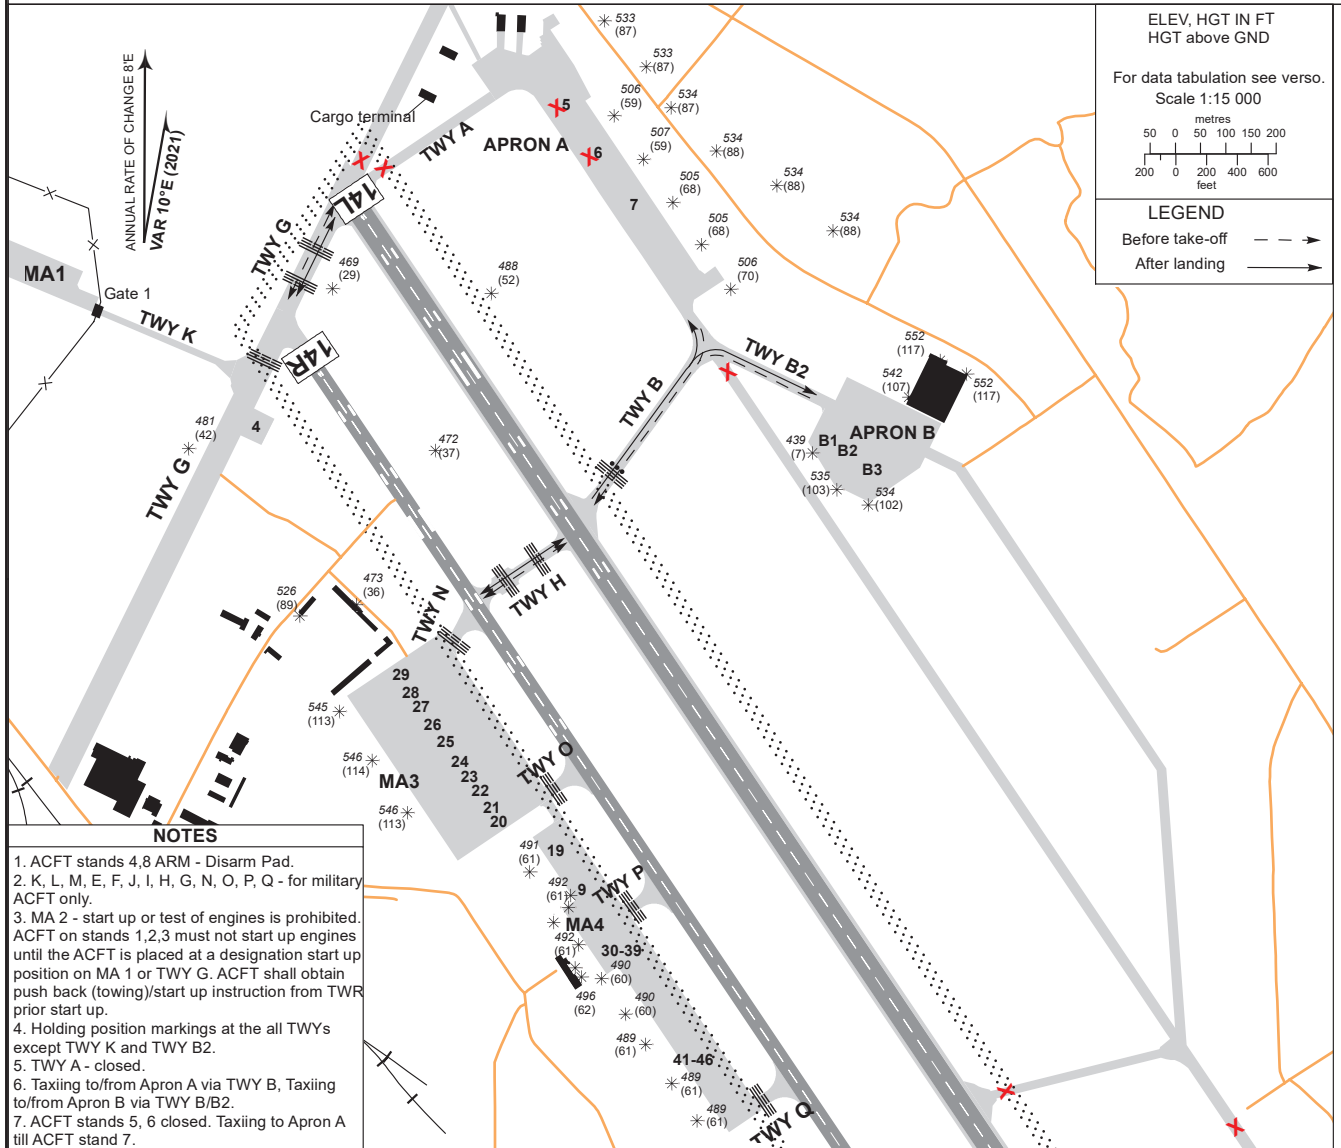

Changes:

07 AUG 2025

©2019 ORO NAVIGACIJA

eAIP 2nd Edition

AERONAUTICAL DATA TABULATION

ACFT STANDS

Stand	Coordinates		Bearing Strength	Stand	Coordinates		Bearing Strength
1	55 54 13.40N	023 21 45.60E	120/R/D/W/T	30	55 53 37.22N	023 23 17.16E	50/R/C/W/T
2	55 54 14.00N	023 21 45.00E	120/R/D/W/T	31	55 53 36.59N	023 23 17.92E	50/R/C/W/T
3	55 54 14.50N	023 21 46.50E	120/R/C/W/T	32	55 53 35.96N	023 23 18.67E	50/R/C/W/T
4	55 54 09.70N	023 22 36.20E	98/R/D/W/T	33	55 53 35.33N	023 23 19.42E	50/R/C/W/T
5	55 54 30.09N	023 23 10.34E	120/R/C/W/T	34	55 53 34.70N	023 23 20.18E	50/R/C/W/T
6	55 54 25.77N	023 23 13.94E	120/R/C/W/T	35	55 53 34.07N	023 23 20.94E	50/R/C/W/T
7	55 54 21.74N	023 23 18.72E	120/R/C/W/T	36	55 53 33.43N	023 23 21.69E	50/R/C/W/T
8	55 52 47.90N	023 24 32.30E	120/R/D/W/T	37	55 53 32.80N	023 23 22.45E	50/R/C/W/T
9	55 53 39.97N	023 23 12.89E	120/R/D/W/T	38	55 53 32.17N	023 23 23.20E	50/R/C/W/T
19	55 53 42.50N	023 23 09.86E	120/R/D/W/T	39	55 53 31.54N	023 23 23.95E	50/R/C/W/T
20	55 53 46.21N	023 23 01.14E	120/R/D/W/T	41	55 53 29.91N	023 23 25.71E	50/R/C/W/T
21	55 53 46.59N	023 23 00.69E	120/R/D/W/T	42	55 53 29.09N	023 23 26.69E	50/R/C/W/T
22	55 53 47.70N	023 22 59.37E	120/R/D/W/T	43	55 53 28.26N	023 23 27.67E	50/R/C/W/T
23	55 53 48.81N	023 22 58.03E	120/R/D/W/T	44	55 53 27.44N	023 23 28.65E	50/R/C/W/T
24	55 53 49.19N	023 22 57.59E	120/R/D/W/T	45	55 53 26.62N	023 23 29.64E	50/R/C/W/T
25	55 53 50.67N	023 22 55.81E	120/R/D/W/T	46	55 53 25.79N	023 23 30.62E	50/R/C/W/T
26	55 53 51.04N	023 22 55.37E	120/R/D/W/T	B1	55 54 08.80N	023 23 41.00E	45/R/A/W/T
27	55 53 52.16N	023 22 54.04E	120/R/D/W/T	B2	55 54 08.10N	023 23 43.20E	45/R/A/W/T
28	55 53 53.27N	023 22 52.71E	120/R/D/W/T	B3	55 54 06.90N	023 23 46.00E	54/R/A/W/T
29	55 53 53.65N	023 22 52.26E	120/R/D/W/T				
Stand	Dimensions M (FT)						
4	54x44 (177x144)						
8	54x48 (177x157)						

APRONS

Apron	Dimensions M (FT)	Bearing Strength	Surface
APRON A	500x75 (1640x246)	120/R/C/W/T	Concrete
APRON B	-	59/F/A/W/T	Asphalt-Concrete
MA 1	200x55 (656x180)	37/R/C/W/U	Concrete
MA 2	70x35 (230x115)	120/R/C/W/T	Concrete
MA 3	393x223 (1289x732)	120/R/D/W/T	Concrete
MA 4	697x71 (2287x233)	50/R/C/W/T	Concrete
MA 5	70x50 (230x164) 2 parking areas	66/R/D/W/T	Concrete
MA 6	-	65/F/D/X/T	Asphalt-Concrete

TAXIWAYS

TWY	Width M (FT)	Bearing Strength	Surface	Centre Line Points	
A	21 (69)	120/R/C/W/T	Concrete	55 54 30.90N 023 23 03.00E	55 54 28.80N 023 22 57.40E
				55 54 25.30N 023 22 48.20E	
B	23 (76)	59/F/A/W/T	Asphalt	55 54 04.00N 023 23 13.00E	55 54 08.90N 023 23 19.40E
				55 54 13.90N 023 23 25.80E	55 54 15.90N 023 23 26.20E
				55 54 16.80N 023 23 25.00E	
B2	23 (76)	59/F/A/W/T	Asphalt	55 54 14.30N 023 23 29.30E	55 54 12.70N 023 23 35.10E
				55 54 11.20N 023 23 40.90E	
E	22,5 (74)	54/R/C/W/T	Concrete	55 52 58.70N 023 24 57.20E	55 52 52.40N 023 24 40.50E
F	12 (39)	96/R/C/W/T	Asphalt	55 52 45.10N 023 24 23.00E	55 52 45.60N 023 24 24.20E
				55 52 46.20N 023 24 25.70E	
G	24 (79)	120/R/C/W/T	Asphalt-Concrete	55 54 13.90N 023 22 36.70E	55 54 17.40N 023 22 39.90E
				55 54 22.90N 023 22 44.80E	
H	24 (79)	110/R/C/W/T	Asphalt	55 53 58.70N 023 23 01.50E	55 54 00.70N 023 23 06.80E
				55 54 02.30N 023 23 11.10E	
I	14 (46)	120/R/C/W/T	Asphalt	55 53 00.60N 023 24 11.00E	55 53 02.40N 023 24 15.70E
				55 53 04.10N 023 24 20.10E	
J	22 (72)	70/R/C/W/T	Asphalt	55 52 47.00N 023 24 27.70E	55 52 48.50N 023 24 31.50E
				55 52 50.30N 023 24 36.30E	
K	12 (39)	74/R/C/W/T	Asphalt	55 54 21.50N 023 21 58.30E	55 54 17.80N 023 22 14.50E
				55 54 13.00N 023 22 34.50E	
L	12 (39)	120/R/C/W/T	Asphalt	55 54 21.10N 023 21 55.70E	55 54 17.50N 023 21 52.00E
				55 54 14.70N 023 21 49.30E	
M	23 (76)	65/F/D/X/T	Asphalt	55 54 20.80N 023 21 56.90E	55 54 15.10N 023 21 59.50E
				55 54 10.00N 023 22 01.80E	
N	23 (76)	120/R/B/W/T	Asphalt	55 53 56.00N 023 22 58.40E	55 53 56.80N 023 22 59.20E
				55 53 57.80N 023 23 00.00E	
O	23 (76)	120/R/B/W/T	Asphalt	55 53 46.30N 023 23 09.60E	55 53 46.90N 023 23 11.20E
P	23 (76)	50/R/C/W/T	Concrete	55 53 38.60N 023 23 18.20E	55 53 39.00N 023 23 19.20E
				55 53 39.40N 023 23 20.30E	
Q	23 (76)	50/R/C/W/T	Concrete	55 53 26.20N 023 23 33.10E	55 53 26.60N 023 23 34.10E
				55 53 27.00N 023 23 35.40E	

Changes: