


Changes: SID TAGOL 1A and EYP45 withdrawn; SID ATMEZ 1A and EYP46 added; note.

19 FEB 2026

©2019 ORO NAVIGACIJA

AIRAC AMDT 01/26

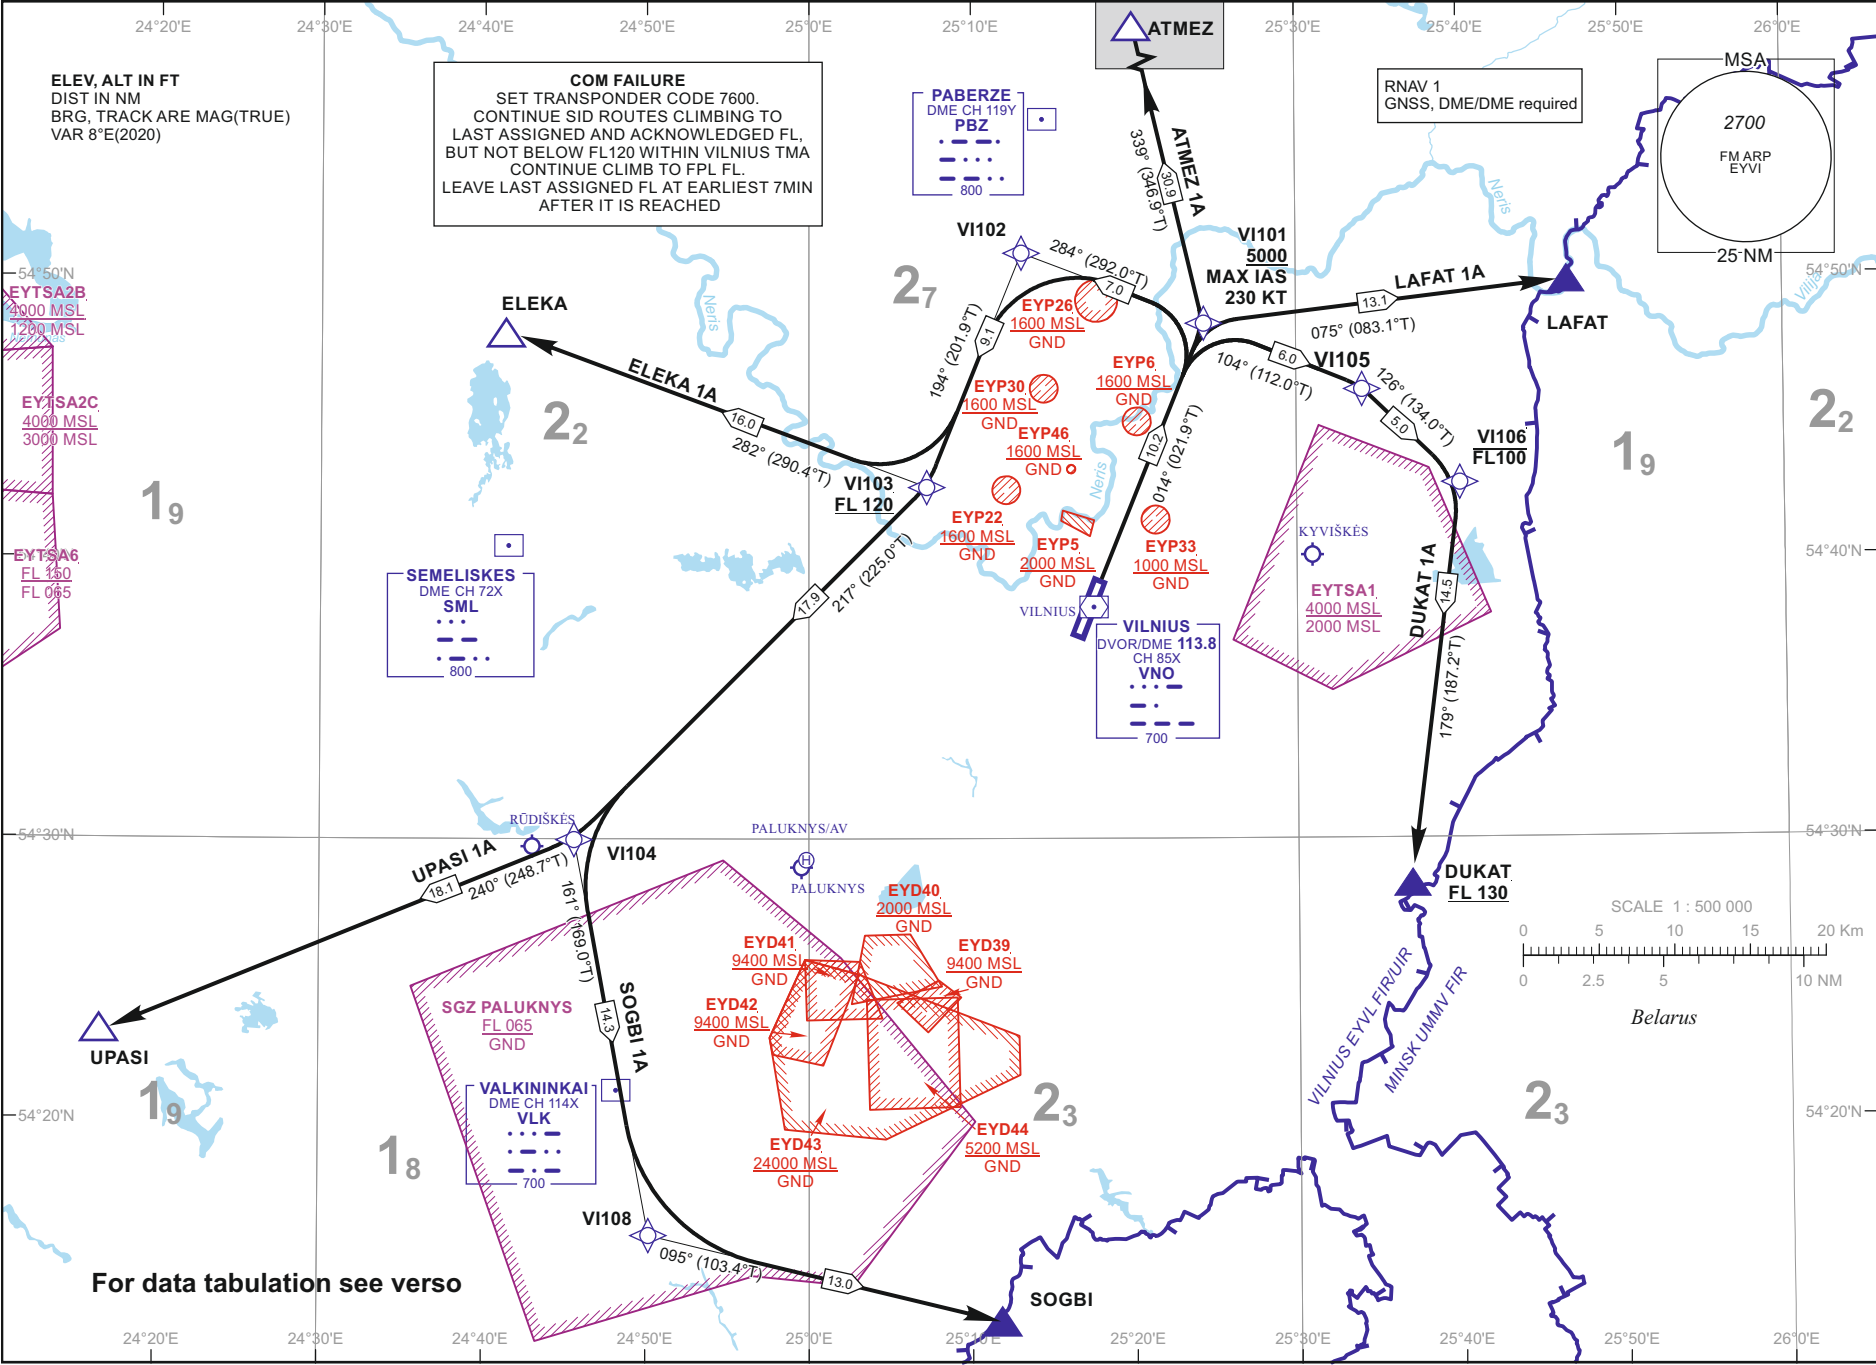

**STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO**

TRANSITION ALT
5000

TWR 118.205
APP 120.705
ATIS 125.805

VILNIUS (EYVI)
RNAV RMY 01
ATMEZ 1A, DUKAT 1A, ELEKA 1A,
LAFAT 1A, SOGBI 1A, UPASI 1A

AIP LITHUANIA

EYVI AD 2.24-10-1

For data tabulation see verso

**STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO**TRANSITION ALT
5000**VILNIUS (EYVI)
RNAV RWY 01**ATMEZ 1A, DUKAT 1A, ELEKA 1A,
LAFAT 1A, SOGBI 1A, UPASI 1A

TABULAR DESCRIPTION

ATMEZ 1A PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL V1101

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	V1101	—	014(021.9)	8.3	10.2	—	+5000	-230	RNAV1
002	TF	ATMEZ	—	339(346.9)	8.3	30.9	—	—	—	RNAV1

DUKAT 1A PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL V1101

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	V1101	—	014(021.9)	8.3	10.2	—	+5000	-230	RNAV1
002	TF	V1105	—	104(112.0)	8.3	6.0	—	—	—	RNAV1
003	TF	V1106	—	126(134.0)	8.3	5.0	—	-FL100	—	RNAV1
004	TF	DUKAT	—	179(187.2)	8.3	14.5	—	+FL130	—	RNAV1

ELEKA 1A PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL V101

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	V1101	—	014(021.9)	8.3	10.2	—	+5000	-230	RNAV1
002	TF	V1102	—	284(292.0)	8.3	7.0	—	—	—	RNAV1
003	TF	V1103	—	194(201.9)	8.3	9.1	—	+FL120	—	RNAV1
004	TF	ELEKA	—	282(290.4)	8.3	16.0	—	—	—	RNAV1

LAFAT 1A PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL V1101

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	V1101	—	014(021.9)	8.3	10.2	—	+5000	-230	RNAV1
002	TF	LAFAT	—	075(083.1)	8.3	13.1	—	—	—	RNAV1

SOGBI 1A PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL V1101

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	V1101	—	014(021.9)	8.3	10.2	—	+5000	-230	RNAV1
002	TF	V1102	—	284(292.0)	8.3	7.0	—	—	—	RNAV1
003	TF	V1103	—	194(201.9)	8.3	9.1	—	+FL120	—	RNAV1
004	TF	V1104	—	217(225.0)	8.3	17.9	—	—	—	RNAV1
005	TF	V1108	—	161(169.0)	8.3	14.3	—	—	—	RNAV1
006	TF	SOGBI	—	095(103.4)	8.3	13.0	—	—	—	RNAV1

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYVI AD 2.22

**STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO**

TRANSITION ALT
5000

**VILNIUS (EYVI)
RNAV RWY 01**
ATMEZ 1A, DUKAT 1A, ELEKA 1A,
LAFAT 1A, SOGBI 1A, UPASI 1A

TABULAR DESCRIPTION

UPASI 1A PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VI101

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	VI101	—	014(021.9)	8.3	10.2	—	+5000	-230	RNAV1
002	TF	VI102	—	284(292.0)	8.3	7.0	—	—	—	RNAV1
003	TF	VI103	—	194(201.9)	8.3	9.1	—	+FL120	—	RNAV1
004	TF	VI104	—	217(225.0)	8.3	17.9	—	—	—	RNAV1
005	TF	UPASI	—	240(248.7)	8.3	18.1	—	—	—	RNAV1

Passing 2500 FT MSL contact with Vilnius APP Channel 120.705

WAYPOINT COORDINATES

FIX/POINTS	COORDINATES	FIX/POINTS	COORDINATES
VI101	54 48 19.6N 025 24 17.8E	ELEKA	54 48 01.6N 024 41 20.1E
VI102	54 50 56.1N 025 13 03.9E	LAFAT	54 49 52.0N 025 46 43.0E
VI103	54 42 30.1N 025 07 12.7E	SOGBI	54 12 47.0N 025 11 45.0E
VI104	54 29 50.3N 024 45 30.9E	UPASI	54 23 12.1N 024 16 37.3E
VI105	54 46 04.7N 025 33 54.3E	PBZ	54 55 38.0N 025 14 23.0E
VI106	54 42 38.5N 025 40 02.8E	SML	54 40 31.2N 024 41 32.4E
VI108	54 15 49.7N 024 50 10.1E	VLK	54 21 02.9N 024 48 13.2E
ATMEZ	55 18 20.9N 025 12 04.7E	VNO	54 38 09.8N 025 17 37.1E
DUKAT	54 28 17.3N 025 36 55.2E		

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYVI AD 2.22

Changes: REP ATMEZ instead V1107; REP TAGOL withdrawn.

SPECIALUSIS TUŠČIAS PUSLAPIS

THIS PAGE INTENTIONALLY LEFT BLANK